


HDTV Labs

Model HD4PNBAG20B

High Definition 250MHz to 2150MHz 20dB Adjustable Gain Amplifier

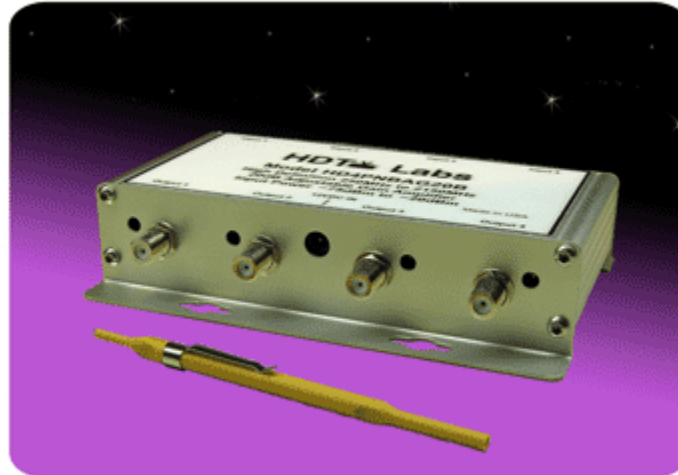

Description

The HD4PNBAG20B is a Professional-Grade 4-channel 20dB adjustable gain amplifier designed to recover low-level signals that may be well below the threshold of most satellite power meters. Each channel has an adjustable gain of -5dB to 20dB with 6dB slope compensation and covers a frequency range of 250MHz to 2150MHz. The HD4PNBAG20B is used in conjunction with stacked, multiswitch, and head-end systems to overcome cable, splitter, tap, and other system losses. The inputs and outputs of each of the four amplifier channels have internal DC blocking capacitors, thus eliminating the need to add external DC blocking capacitors.

MADE IN USA

Features:

- Wide signal dynamic range capability
- Ultra-low level signal recovery
- Corrosion-resistant connectors
- Rugged aluminum construction

Specification	Minimum	Typical	Maximum
Frequency.....	250MHz		2150MHz
Noise Figure.....		4.0dB	5.5dB
Absolute Maximum Total Input Power ¹			0dBm
Input Power Range.....	-75dBm ²		-20dBm ³
Individual Transponder Output Power.....		0dBm	
Gain			
at 250MHz.....	12.5dB	13.5dB	14.5dB
at 750MHz.....	15.0dB	16.0dB	17.0dB
at 950MHz.....	16.0dB	17.0dB	18.0dB
at 1450MHz.....	17.5dB	18.5dB	19.5dB
at 1650MHz.....	18.0dB	19.0dB	20.0dB
at 2150MHz.....	18.0dB	19.0dB	20.0dB
Channel-to-Channel Isolation ⁴		45dB	


Specification	Minimum	Typical	Maximum
Input Return Loss			
at 250MHz.....		11dB	
at 950MHz.....		20dB	
at 1450MHz.....		20dB	
at 2150MHz.....		12dB	
Output Return Loss			
at 250MHz.....		12dB	
at 950MHz.....		20dB	
at 1450MHz.....		16dB	
at 2150MHz.....		11dB	
1dB Input Gain Compression Point ⁵			
at 250MHz.....		-3dBm	
at 950MHz.....		-3dBm	
at 1450MHz.....		-3dBm	
at 2150MHz.....		-5dBm	
Input Signal Power for 3 rd Order Intermod Rejection Ratio of 40dB ⁶			
at 250MHz.....		-8dBm	
at 950MHz.....		-11dBm	
at 1450MHz.....		-13dBm	
at 2150MHz.....		-15dBm	
DC Supply Voltage			12VDC
DC Supply Current.....			650mA

For Indoor Use Only. The HD4PNBAG20B is supplied with an external 12VDC power supply. Operating temperature of the HD4PNBAG20B is -40°C to +85°C. The mechanical dimensions are 6.4”W × 4.4”L × 1.5”H


(Specifications subject to change without notice.)

Notes:

1. Absolute Maximum Power is the total power that arrives at the amplifier input from 250MHz to 2150MHz. Satellite power meters typically read the power level of a single transponder at a time. If all transponders are active from 250MHz to 2150MHz and the power of all transponders are equal, then total available input power across the 250MHz to 2150MHz bandwidth is approximated by taking the satellite power meter reading at 1450MHz and adding 20dB. Make sure not to exceed -20dBm as measured with a satellite power meter at 1450MHz.
2. The -75dBm level assumes that the overall system noise figure is not too high such that the carrier-to-noise ratio of the satellite signal has not been degraded such that signal recovery is not possible. Signal levels lower than -75dBm can be recovered with properly designed systems having over-all low system noise figures. Low noise figure systems are achieved by avoiding the addition of too many attenuators or too much loss in front of an amplifier block. It is always better to add loss after an amplifier to minimize system noise figure as long as the signal at the amplifier input does not over-drive that amplifier.
3. Assumes maximum power levels as measured with a satellite power meter and all transponder signals active from 250MHz to 2150MHz. (See note 1) A frequency response loss slope of 6dB is assumed, i.e. transponder power measured at 250MHz with a satellite power meter is 6dB higher than power measured at 2150MHz due to cable loss versus frequency characteristics. If transponder power levels are equal, limit the maximum power to -20dBm at all frequencies. An easy method to determine if the amplifier is being over-driven is to connect a satellite power meter to the output of the amplifier and check C/N, BER, and IRD performance. If acceptable transponder power levels are measured but low C/N values, high BER values, and low IRD levels are measured, reduce the input level into the amplifier until good C/N, BER, and IRD results are measured.
4. Channel-to-Channel Isolation is measured referenced to the output of each amplifier. Channel-to-Channel Isolation has a typical value of 35dB at 2150MHz.
5. Measured using a single CW signal. No transponder signals present.
6. Measured using two CW signals with 1MHz spacing. No transponder signals present.

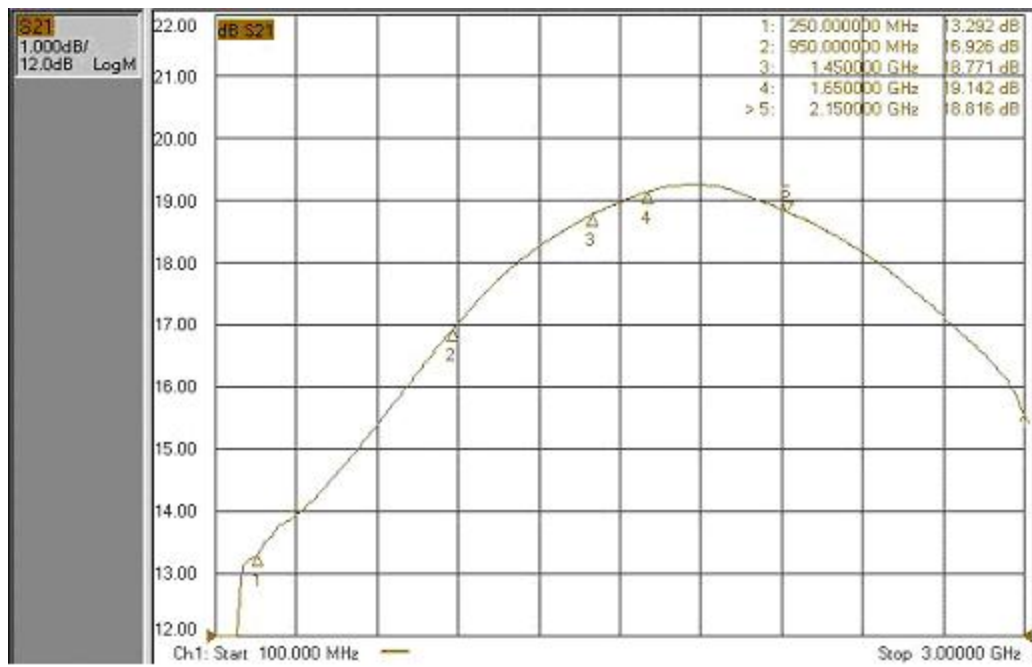

Gain

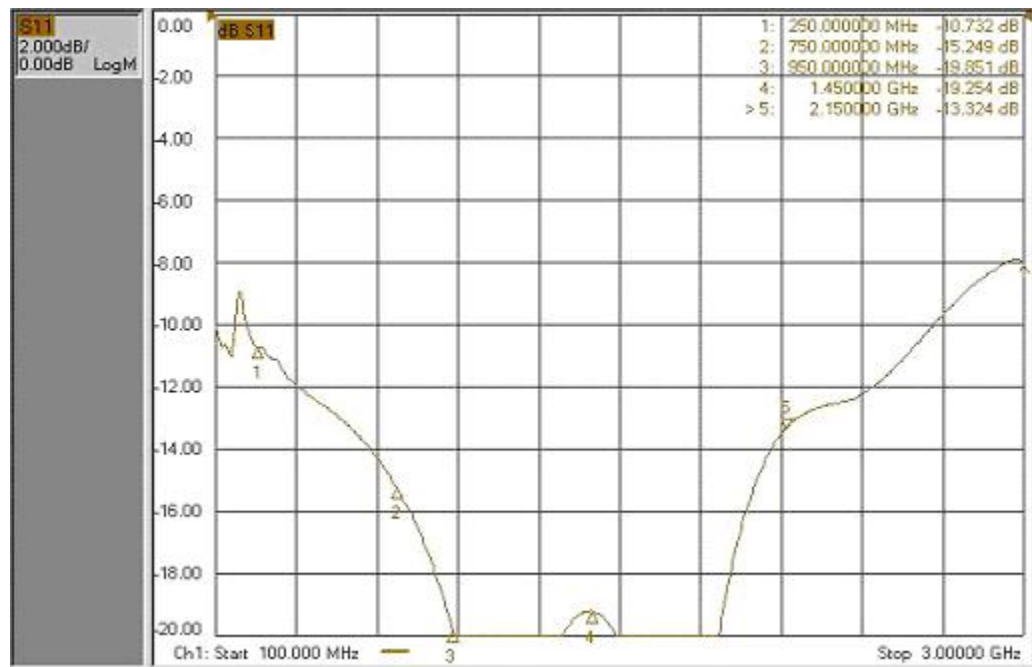

Input Return Loss



Output Return Loss